

SPECIFICATIONS: 916/918

Dimensions:	U.S.	Metric:
Weight	460 lbs	208.65 kg
Height	36"	914.44 mm
Length	66"	1.68 m
Width	20.75"	527.05 mm

Engine Options*:

Subaru (HP: 9)	EX27	EX27
Honda (HP: 8.5)	GX270	GX270
Fuel	Gasoline	Gasoline

Additional Specs:

Hydraulic Reservoir	7.8 gallons	29.53 liters
Ground Drive Forward	78 ft/min	23.77 m/min
Ground Drive Reverse	78 ft/min	23.77 m/min
Tine Speed	290 rpm	290 rpm

*EX27 specs per <http://robinamerica.com/p/features.aspx?pid=10>
GX270 specs per <http://engines.honda.com/models/model-detail/gx270>



916S/916H • 918S/918H REAR TINE TILLER

DESIGN

All hydraulic means easy maintenance, no downtime, and the most efficient use of your horsepower to get the job done. Till effectively in small spaces by choosing either a 16 or 18" tilling width on these models. The open design provides easy access to the hydraulics when maintaining or repairing. The unique swivel handlebar featured on this compact unit means you can walk alongside your tiller rather than in your freshly tilled earth. The heavy design means your tiller works for you instead of tossing you around. Counter-rotating tines break up the most difficult soil, clay, or sod. Wheels and tines work independently of each other to allow your tilling travel speed to be adjusted to the soil conditions.


CONTROLS

The operator-friendly controls couldn't be easier: one handle to set the tine drive and one to adjust the wheel drive. Engage the clutch lever, use the variable speed drive to adjust the ground speed, and engage the tines when you are ready to till. If you need to stop for a moment, drop the clutch and the tines and wheels will stop, leaving your engine running and ready to pick up where you left off.

ROI

With no belts, chains, or gears to mess with, maintenance is minimal. A simplified control valve at the handlebar further reduces moving parts. The hydraulic motor is recessed into the outside of the frame for easy accessibility and removal. Ball bearing support on each end of the tine shaft allows the motor to be removed for service by simply removing two bolts. A tiller that's down produces no revenue: by choosing hydraulics, you'll increase utilization and minimize maintenance costs, improving your bottom line.

FEATURES

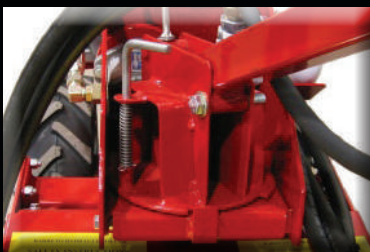

Pivoting handlebar allows closer tilling along houses or fencelines



Hubs unlock to free-wheel the tiller when the engine isn't running



Counter-rotating tines cut through sod and hard packed soil



All hydraulics are easily accessed for maintenance and repair



Simple controls are easy to learn and easy to operate

CONTACT US

1-800-525-7348

info@barretomfg.com

TILLING WIDTH

16 or 18"

BARRETO

www.barretomfg.com